

Product Name: 14" Stud
Description: 1400S162-54

Physical Properties

| | | | |
|---------------------|-------|------------------------|--------|
| Web Depth (in) | 14.00 | Gauge | 16 |
| Flange Width (in) | 1.625 | Mils | 54 |
| Return Lip (in) | 0.500 | Design Thickness (in) | 0.0566 |
| Standard Coating | CP60 | Minimum Thickness (in) | 0.0538 |
| Available Coating * | CP90 | Yield Stress Fy (ksi) | 50 |
| Weight (lb/ft) | 3.430 | Ultimate, Fu (ksi) | 65 |

Section Properties

| | |
|-------------------------------|------------------------|
| Cross Sectional Area (A) | 1.009 in ² |
| Moment of Inertia (Ix) | 23.302 in ⁴ |
| Radius of Gyration (Rx) | 4.805 in |
| Gross Moment of Inertia (Iy) | 0.218 in ⁴ |
| Gross Radius of Gyration (Ry) | 0.464 in |

Effective Section Properties


| | |
|----------------------------------------|------------------------|
| Moment of Inertia for Deflection (Ixe) | 20.365 in ⁴ |
| Section Modulus (Sxe) | 2.256 in ³ |
| Allowable Bending Moment (Ma) | 67.54 in-k |

Torsional Properties

| | |
|-------------------------------------------------|-----------------------|
| St. Venant Torsion Constant (Jx1000) | 1.078 in ⁴ |
| Warping Constant (Cw) | 8.980 in ⁶ |
| Distance from Shear Center to Neutral Axis (Xo) | -0.667 in |
| Radii of Gyration (Ro) | 4.873 in |
| Torsional Flexural Constant (Beta) | 0.981 |

Web-depth to thickness ratio exceeds 200. Web Stiffeners are required at all support points and concentrated loads.

*By request

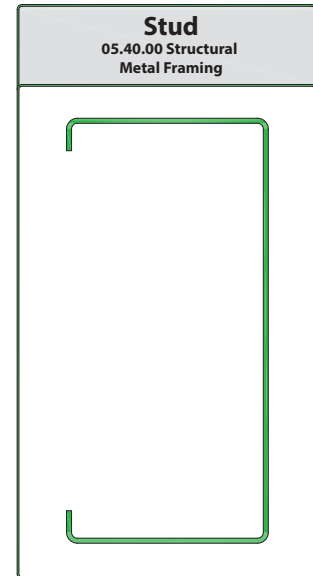

MANUFACTURING Codes & Standards

NASPEC AISI S100-07 IBC 2009 2012 Compliant
Coated in accordance to ASTM A1003 & A653
Meets or exceeds ASTM C955 & AISI S200
Code Evaluation Report ICC-ESR #3957

GREEN Benefits & LEED Data:

LEED Credit MR 2 - Construction Waste Mgmt - 1-2 Points
LEED Credit MR 4 - Recycled Credit - 1-2 Points
LEED Credit MR 5 - Regional Materials - 1-2 Points
CRACO products are 100% recyclable
Contact Technical Services for more information