

Product Name: 3-5/8" Stud
Description: 362S200-54

Physical Properties

Web Depth (in)	3.625	Gauge	16
Flange Width (in)	2.000	Mils	54
Return Lip (in)	0.625	Design Thickness (in)	0.0566
Standard Coating	CP60	Minimum Thickness (in)	0.0538
Available Coating *	CP90	Yield Stress Fy (ksi)	50
Weight (lb/ft)	1.630	Ultimate, Fu (ksi)	65

Section Properties

Cross Sectional Area (A)	0.479 in ²
Moment of Inertia (Ix)	1.030 in ⁴
Radius of Gyration (Rx)	1.467 in
Gross Moment of Inertia (Iy)	0.277 in ⁴
Gross Radius of Gyration (Ry)	0.761 in


Effective Section Properties

Moment of Inertia for Deflection (Ixe)	1.030 in ⁴
Section Modulus (Sxe)	0.490 in ³
Allowable Bending Moment (Ma)	14.66 in-k

Torsional Properties

St. Venant Torsion Constant (Jx1000)	0.511 in ⁴
Warping Constant (Cw)	0.896 in ⁶
Distance from Shear Center to Neutral Axis (Xo)	-1.715 in
Radii of Gyration (Ro)	2.382 in
Torsional Flexural Constant (Beta)	0.482

*By request

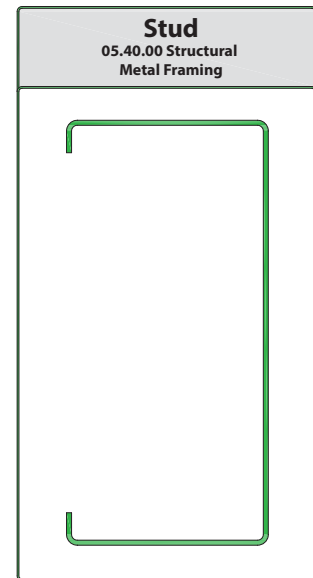

MANUFACTURING Codes & Standards

NASPEC AISI S100-07 IBC 2009 2012 Compliant
Coated in accordance to ASTM A1003 & A653
Meets or exceeds ASTM C955 & AISI S200
Code Evaluation Report ICC-ESR #3957

GREEN Benefits & LEED Data:

LEED Credit MR 2 - Construction Waste Mgmt - 1-2 Points
LEED Credit MR 4 - Recycled Credit - 1-2 Points
LEED Credit MR 5 - Regional Materials - 1-2 Points
CRACO products are 100% recyclable
Contact Technical Services for more information