

**Product Name:** 3-5/8" Track 2-1/2" Legs  
**Description:** 362T250-68

### Physical Properties

Web Depth (in)	3.625	Gauge	14
Leg Length (in)	2.500	Mils	68
Standard Coating	CP60	Design Thickness (in)	0.0713
Available Coating *	CP90	Minimum Thickness (in)	0.0677
Weight (lb/ft)	2.090	Yield Stress Fy (ksi)	33
		Ultimate, Fu (ksi)	45

### Section Properties

Cross Sectional Area (A)	0.614 in <sup>2</sup>
Moment of Inertia (Ix)	1.565 in <sup>4</sup>
Radius of Gyration (Rx)	1.597 in
Gross Moment of Inertia (Iy)	0.406 in <sup>4</sup>
Gross Radius of Gyration (Ry)	0.813 in


### Effective Section Properties

Moment of Inertia for Deflection (Ixe)	1.337 in <sup>4</sup>
Section Modulus (Sxe)	0.546 in <sup>3</sup>
Allowable Bending Moment (Ma)	10.79 in-k

### Torsional Properties

St. Venant Torsion Constant (Jx1000)	1.040 in <sup>4</sup>
Warping Constant (Cw)	1.038 in <sup>6</sup>
Distance from Shear Center to Neutral Axis (Xo)	-1.686 in
Radii of Gyration (Ro)	2.460 in
Torsional Flexural Constant (Beta)	0.530

\*By request

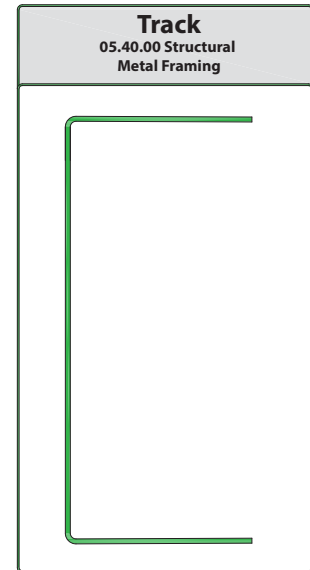

### MANUFACTURING Codes & Standards

NASPEC AISI S100-07 IBC 2009 2012 Compliant  
 Coated in accordance to ASTM A1003 & A653  
 Meets or exceeds ASTM C955 & AISI S200  
 Code Evaluation Report ICC-ESR #3957

### GREEN Benefits & LEED Data:

LEED Credit MR 2 - Construction Waste Mgmt - 1-2 Points  
 LEED Credit MR 4 - Recycled Credit - 1-2 Points  
 LEED Credit MR 5 - Regional Materials - 1-2 Points  
 CRACO products are 100% recyclable  
 Contact Technical Services for more information