

Product Category: Strapping

Product Name: Flat Strap

Physical Properties

Web Depth (in) 1.5, 2, 3, 4, 6, 8 (Other webs available by request)
 Length (ft) 10.00 (Other lengths available by request)

Available Gauge Thickness 25eq, 25, 20eq, 20ns, 20, 18, 16, 14, 12

Available Mil Thickness 15, 18, 19, 30, 33, 43, 54, 68, 97


Available Yield Stress (ksi) 33 or 50 by request

Available Coatings G40, CP60, CP90 by request

18m - 30m material produced in accordance with ASTM C645 / AISI S220

33m - 97m material produced in accordance with ASTM C955 / AISI S200

Steel sheet meets ASTM A1003 & A653

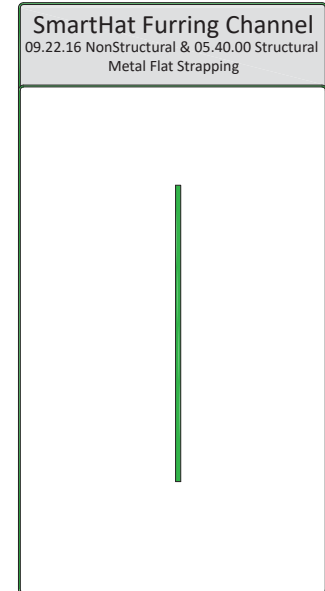

MANUFACTURING Codes & Standards

- NASPEC AISI S100-07 IBC 2009 2012 Compliant
- Coated in accordance to ASTM A1003 & A653
- Meets or exceeds ASTM C645 & C745 & AISI S220
- Meets or exceeds ASTM C955 & AISI S200

GREEN Benefits & LEED Data:

- LEED Credit MR 2 - Construction Waste Mgmt - 1-2 Points
- LEED Credit MR 4 - Recycled Credit - 1-2 Points
- LEED Credit MR 5 - Regional Materials - 1-2 Points
- CRACO products are 100% recyclable
- Contact Technical Services for more information