

RC-XL Resilient Channel

Product Number: SFRC-XL

RC-XL features a wider top flange and heavier mil thickness than standard RC-1 products.


RC-XL is typically installed perpendicular to wood or steel framing products in wall and floor/ceiling assemblies.

Product Information:

Members manufactured in accordance with AISI S220 & ASTM C645.

0.0220" Design Thickness / 0.0205" Min. Delivered Thickness per AISI.

22mils / 33ksi

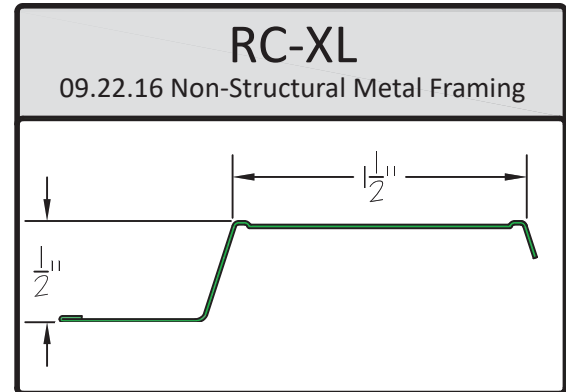

Code & Standards:

Galvanized sheet steel meets or exceeds requirements of ASTM A924 & A1003 G40 min. (Heavier coatings available by request CP60, CP90).

MSDS & Product Certification Information available at www.cracomaterials.com.

Product Packaging:

Stock Length: 12' lengths

ASTM & Code Standards:

For installation & storage information refer to ASTM C754.

Refer to the Gypsum Association Fire Resistance & Sound Control Manual for STC Ratings.

Refer to the USG Fire-Resistant Assemblies Brochure for additional STC Ratings.

Refer to UL.com for Fire Rated Assemblies.

Green Benefits & LEED Data:

LEED Credit MR 2 - Construction Waste Management 1-2 Points

LEED Credit MR 4 - Recycled Credit 1-2 Points

LEED Credit MR 5 - Regional Materials 1-2 Points

CRACO products are 100% recyclable

Contact CRACO Technical Services for more information