


Product Category: 150F125-15
Product Name: 1-1/2" 15mil SmartHat Furring Channel

Physical Properties

Web Depth (in)	1.500	Yield Stress Fy (KSI)	50
Flange Width (in)	1.250	Mils	15
Coating A1003	G40	Design Thickness (in)	0.0157
G60 Available by Request		Minimum Thickness (in)	0.0149
Weight (lb/ft)	0.267	Gauge EQ	25

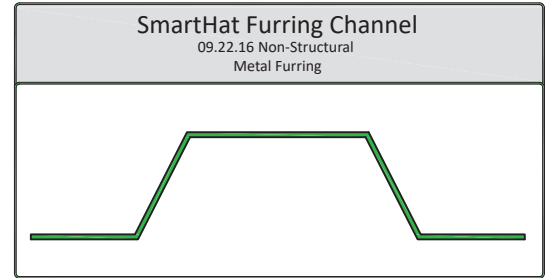

Section Properties

Cross Sectional Area (A)	0.0786 in ²
Moment of Inertia (Ix)	0.0261 in ⁴
Radius of Gyration (Rx)	0.5764 in
Gross Moment of Inertia (Iy)	0.0391 in ⁴

Effective Section Properties

Moment of Inertia for Deflection (Ixe)	0.0239 in ⁴
Section Modulus (Sxe)	0.0264 in ³
Allowable Bending Moment (Ma)	0.6580 in-k

Hat Furring Allowable Spans L/240										
Product 150F125-15	Span Type	4 psf			6 psf			13 psf		
		Hat Spacing (in)			Hat Spacing (in)			Hat Spacing (in)		
		12	16	24	12	16	24	12	16	24
	Single	7'-4"	6'-8"	5'-10"	6'-5"	5'-10"	5'-1"	4'-11"	4'-6"	3'-11"
	Multiple	9'-1"	8'-3"	7'-2"	7'-11"	7'-2"	6'-3"	6'-1"	5'-1"	3'-11"

Hat Furring Allowable Spans L/360										
Product 150F125-15	Span Type	4 psf			6 psf			13 psf		
		Hat Spacing (in)			Hat Spacing (in)			Hat Spacing (in)		
		12	16	24	12	16	24	12	16	24
	Single	6'-5"	5'-10"	5'-1"	5'-7"	5'-1"	4'-5"	4'-4"	3'-11"	3'-5"
	Multiple	7'-11"	7'-2"	6'-3"	6'-11"	6'-3"	5'-6"	5'-4"	4'-10"	3'-11"

MANUFACTURING Codes & Standards

- NASPEC AISI S100-07 IBC 2009 2012 Compliant
- Coated in accordance to ASTM A1003 & A653
- Meets or exceeds ASTM C645 & C745 & AISI S220

GREEN Benefits & LEED Data:

- LEED Credit MR 2 - Construction Waste Mgmt - 1-2 Points
- LEED Credit MR 4 - Recycled Credit - 1-2 Points
- LEED Credit MR 5 - Regional Materials - 1-2 Points
- CRACO products are 100% recyclable
- Contact Technical Services for more information