


Product Category: 150F125-30
Product Name: 1-1/2" 30mil SmartHat Furring Channel

Physical Properties

Web Depth (in)	1.500	Yield Stress Fy (KSI)	33
Flange Width (in)	1.250	Mils	30
Coating A1003	G40	Design Thickness (in)	0.0312
G60 Available by Request		Minimum Thickness (in)	0.0296
Weight (lb/ft)	0.525	Gauge	20

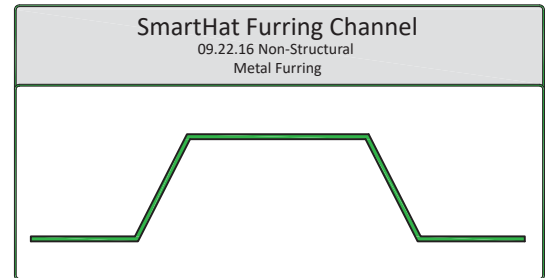

Section Properties

Cross Sectional Area (A)	0.1540 in ²
Moment of Inertia (Ix)	0.0500 in ⁴
Radius of Gyration (Rx)	0.5710 in
Gross Moment of Inertia (Iy)	0.0767 in ⁴

Effective Section Properties

Moment of Inertia for Deflection (Ixe)	0.0503 in ⁴
Section Modulus (Sx)	0.0639 in ³
Allowable Bending Moment (Ma)	1.2630 in-k

Hat Furring Allowable Spans L/240										
Product 150F125-30	Span Type	4 psf			6 psf			13 psf		
		Hat Spacing (in)			Hat Spacing (in)			Hat Spacing (in)		
		12	16	24	12	16	24	12	16	24
	Single	9'-5"	8'-6"	7'-5"	8'-2"	7'-5"	6'-6"	6'-4"	5'-9"	5'-0"
	Multiple	11'-7"	10'-6"	9'-2"	10'-2"	9'-2"	8'-0"	7'-10"	7'-0"	5'-8"

Hat Furring Allowable Spans L/360										
Product 150F125-30	Span Type	4 psf			6 psf			13 psf		
		Hat Spacing (in)			Hat Spacing (in)			Hat Spacing (in)		
		12	16	24	12	16	24	12	16	24
	Single	8'-2"	7'-5"	6'-6"	7'-2"	6'-6"	5'-8"	5'-6"	5'-0"	4'-5"
	Multiple	10'-2"	9'-2"	8'-0"	8'-10"	8'-0"	7'-0"	6'-10"	6'-3"	5'-5"

MANUFACTURING Codes & Standards

- NASPEC AISI S100-07 IBC 2009 2012 Compliant
- Coated in accordance to ASTM A1003 & A653
- Meets or exceeds ASTM C645 & C745 & AISI S220

GREEN Benefits & LEED Data:

- LEED Credit MR 2 - Construction Waste Mgmt - 1-2 Points
- LEED Credit MR 4 - Recycled Credit - 1-2 Points
- LEED Credit MR 5 - Regional Materials - 1-2 Points
- CRACO products are 100% recyclable
- Contact Technical Services for more information