

**Product Name:** 12" Stud  
**Description:** 1200S200-54

### Physical Properties

Web Depth (in)	12.00	Gauge	16
Flange Width (in)	2.000	Mils	54
Return Lip (in)	0.625	Design Thickness (in)	0.0566
Standard Coating	CP60	Minimum Thickness (in)	0.0538
Available Coating *	CP90	Yield Stress Fy (ksi)	50
Weight (lb/ft)	3.240	Ultimate, Fu (ksi)	65

### Section Properties

Cross Sectional Area (A)	0.953 in <sup>2</sup>
Moment of Inertia (Ix)	17.662 in <sup>4</sup>
Radius of Gyration (Rx)	2.944 in
Gross Moment of Inertia (Iy)	0.393 in <sup>4</sup>
Gross Radius of Gyration (Ry)	0.643 in

### Effective Section Properties


Moment of Inertia for Deflection (Ixe)	16.334 in <sup>4</sup>
Section Modulus (Sxe)	2.073 in <sup>3</sup>
Allowable Bending Moment (Ma)	62.070 in-k

### Torsional Properties

St. Venant Torsion Constant (Jx1000)	1.017 in <sup>4</sup>
Warping Constant (Cw)	11.55 in <sup>6</sup>
Distance from Shear Center to Neutral Axis (Xo)	-1.032 in
Radii of Gyration (Ro)	4.474 in
Torsional Flexural Constant (Beta)	0.947

**Web-depth to thickness ratio exceeds 200. Web Stiffeners are required at all support points and concentrated loads.**

\*By request

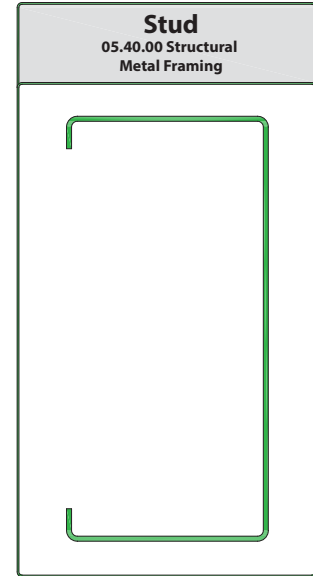

### MANUFACTURING Codes & Standards

NASPEC AISI S100-07 IBC 2009 2012 Compliant  
Coated in accordance to ASTM A1003 & A653  
Meets or exceeds ASTM C955 & AISI S200  
Code Evaluation Report ICC-ESR #3957

### GREEN Benefits & LEED Data:

LEED Credit MR 2 - Construction Waste Mgmt - 1-2 Points  
LEED Credit MR 4 - Recycled Credit - 1-2 Points  
LEED Credit MR 5 - Regional Materials - 1-2 Points  
CRACO products are 100% recyclable  
Contact Technical Services for more information