

Product Name: 14" Stud
Description: 1400S350-54

Physical Properties

Web Depth (in)	14.00	Gauge	16
Flange Width (in)	3.500	Mils	54
Return Lip (in)	1.000	Design Thickness (in)	0.0566
Standard Coating	CP60	Minimum Thickness (in)	0.0538
Available Coating *	CP90	Yield Stress Fy (ksi)	50
Weight (lb/ft)	4.350	Ultimate, Fu (ksi)	65

Section Properties

Cross Sectional Area (A)	1.278 in ²
Moment of Inertia (Ix)	35.83 in ⁴
Radius of Gyration (Rx)	5.295 in
Gross Moment of Inertia (Iy)	1.947 in ⁴
Gross Radius of Gyration (Ry)	1.234 in

Effective Section Properties


Moment of Inertia for Deflection (Ixe)	33.308 in ⁴
Section Modulus (Sxe)	3.249 in ³
Allowable Bending Moment (Ma)	97.27 in-k

Torsional Properties

St. Venant Torsion Constant (Jx1000)	1.365 in ⁴
Warping Constant (Cw)	76.252 in ⁶
Distance from Shear Center to Neutral Axis (Xo)	-2.207 in
Radii of Gyration (Ro)	5.868 in
Torsional Flexural Constant (Beta)	0.859

This section does not meet the requirements of AISI. Advised to increase the thickness.

*By request

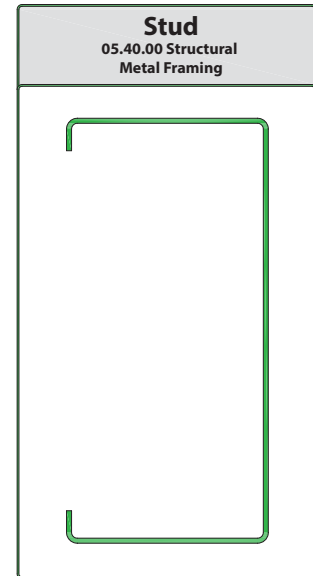

MANUFACTURING Codes & Standards

NASPEC AISI S100-07 IBC 2009 2012 Compliant
Coated in accordance to ASTM A1003 & A653
Meets or exceeds ASTM C955 & AISI S200
Code Evaluation Report ICC-ESR #3957

GREEN Benefits & LEED Data:

LEED Credit MR 2 - Construction Waste Mgmt - 1-2 Points
LEED Credit MR 4 - Recycled Credit - 1-2 Points
LEED Credit MR 5 - Regional Materials - 1-2 Points
CRACO products are 100% recyclable
Contact Technical Services for more information