

Product Name: 6" SmartStud 30mil

Description: 600SS125-30

Physical Properties

Web Depth (in)	6.000	Yield Stress Fy (KSI)	33
Flange Width (in)	1.250	Mils	30
Return Lip (in)	0.250	Design Thickness (in)	0.0312
Standard Coating	G40	Minimum Thickness (in)	0.0296
Weight (lb/ft)	0.910	Gauge	20

Section Properties

Cross Sectional Area (A)	0.268 in ²
Moment of Inertia (Ix)	1.275 in ⁴
Radius of Gyration (Rx)	2.181 in
Gross Moment of Inertia (Iy)	0.038 in ⁴
Gross Radius of Gyration (Ry)	0.376 in

Effective Section Properties


Moment of Inertia for Deflection (Ixe)	1.218 in ⁴
Section Modulus (Sxe)	0.315 in ³
Allowable Bending Moment (Ma)	6.220 in-k

Torsional Properties

St. Venant Torsion Constant (Jx1000)	0.0870 in ⁴
Warping Constant (Cw)	0.2740 in ⁶
Distance from Shear Center to Neutral Axis (Xo)	-0.611 in
Radii of Gyration (Ro)	2.296 in
Torsional Flexural Constant (Beta)	0.929
Unbraced Length (Lu)	27.6 in

Limiting Wall Heights - Composite

Spacing 6" SmartStud30	5 psf			7.5 psf			10 psf		
	L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
12"	32'-1"	25'-6"	22'-3"	28'-0"	22'-3"	19'-5"	24'-7"	20'-3"	17'-6"
16"	29'-2"	23'-2"	20'-3"	24'-9"	20'-3"	17'-8"	21'-5"	18'-4"	15'-10"
24"	25'-1"	20'-3"	17'-8"	20'-6"	17'-8"	15'-5"	17'-9"	16'-0"	13'-8"

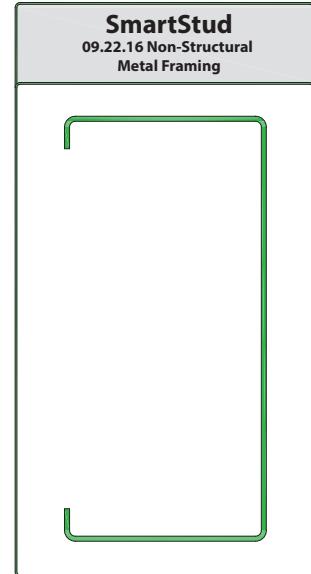

MANUFACTURING Codes & Standards

- NASPEC AISI S100-07 IBC 2009 2012 Compliant
- Coated in accordance to ASTM A1003 & A653
- Meets or exceeds ASTM C645 & C745 & AISI S220
- Multiple UL Design Listings including U419
- 3rd Party Code Evaluation Report ICC-ESR #3943
- US Patent No. D618,365S

GREEN Benefits & LEED Data:

- LEED Credit MR 2 - Construction Waste Mgmt - 1-2 Points
- LEED Credit MR 4 - Recycled Credit - 1-2 Points
- LEED Credit MR 5 - Regional Materials - 1-2 Points
- CRACO products are 100% recyclable
- Contact Technical Services for more information