

**Product Name:** 6" SmartTrack 33mil 2" Legs

**Description:** 600ST200-33

### Physical Properties

Web Depth (in)	6.00	Yield Stress Fy (KSI)	33
Leg Length (in)	2.00	Mils	33
Standard Coating	G40	Design Thickness (in)	0.0346
Weight (lb/ft)	1.180	Minimum Thickness (in)	0.0329
		Gauge	20

### Section Properties


Cross Sectional Area (A)	0.346 in <sup>2</sup>
Moment of Inertia (Ix)	1.913 in <sup>4</sup>
Radius of Gyration (Rx)	2.352 in
Gross Moment of Inertia (Iy)	0.126 in <sup>4</sup>
Gross Radius of Gyration (Ry)	0.604 in

### Effective Section Properties

Moment of Inertia for Deflection (Ixe)	1.542 in <sup>4</sup>
Section Modulus (Sxe)	0.333 in <sup>3</sup>
Allowable Bending Moment (Ma)	6.590 in-k

### Torsional Properties

St. Venant Torsion Constant (Jx1000)	0.138
Warping Constant (Cw)	0.847 in <sup>6</sup>
Distance from Shear Center to Neutral Axis (Xo)	-1.048 in
Radii of Gyration (Ro)	2.645 in
Torsional Flexural Constant (Beta)	0.843

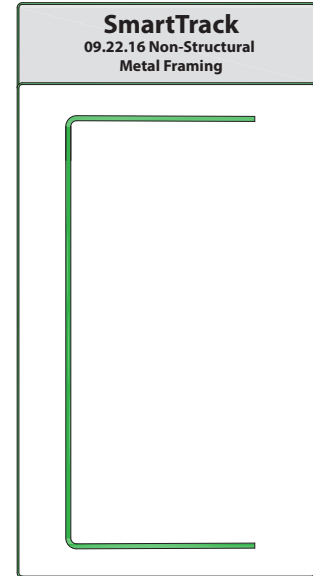

### MANUFACTURING Codes & Standards

- NASPEC AISI S100-07 IBC 2009 2012 Compliant
- Coated in accordance to ASTM A1003 & A653
- Meets or exceeds ASTM C645 & C745 & AISI S220
- Multiple UL Design Listings including U419
- 3rd Party Code Evaluation Report ICC-ESR #3943
- US Patent No. D618,365S

### GREEN Benefits & LEED Data:

- LEED Credit MR 2 - Construction Waste Mgmt - 1-2 Points
- LEED Credit MR 4 - Recycled Credit - 1-2 Points
- LEED Credit MR 5 - Regional Materials - 1-2 Points
- CRACO products are 100% recyclable
- Contact Technical Services for more information